



AXELERA
ARTIFICIAL INTELLIGENCE

Axelera Embedded 110m Thermal Design Guide

2026-08-03
AX-000642-DG-3
Version: Issue 3

Copyright © | 2026 | Axelera AI BV | All rights reserved.

This documentation is protected by copyright and is intended solely for use as provided and in accordance with the applicable license agreement. Unauthorized use, reproduction, or distribution of this documentation, in whole or in part, is strictly prohibited.

Document and proprietary information

Document and information property

This document and the information contained herein are the property of Axelera AI. It must not be reproduced or otherwise disclosed without prior consent from Axelera AI.

Trademarks

The Axelera "AX" logo is a trademark of Axelera AI BV, registered in the Netherlands and other countries. "AXELERA" and "METIS" are registered as word marks across a number of countries/regions.

All other product and company names and registered trademarks may be the property of their respective owners.

Document revision history

Revision	Date	Description
1	2025-03-20	First Issue.
2	2025-03-31	Updated <i>Table 2: Critical component list for heat generation</i> .
3	2026-08-03	Rebranded product name.

TABLE OF CONTENTS

DOCUMENT AND PROPRIETARY INFORMATION	2
1 INTRODUCTION AND SCOPE	4
1.1 RECOMMENDED READING	4
1.2 GLOSSARY	4
2 ABOUT THE AXELERA EMBEDDED 110M	5
3 METIS AIPU CHARACTERISTICS AND PROTECTION	6
3.1 METIS AIPU CHARACTERISTICS	6
3.2 THERMAL THROTTLING AND THERMAL SAFETY	6
4 THERMAL CHARACTERISTICS OF AXELERA EMBEDDED 110M	7
4.1 POWER DISTRIBUTION AND HEAT DISSIPATION CONSIDERATIONS	7
4.2 THERMAL RESISTANCE MODEL	8
5 THERMAL SOLUTION OPTIONS FOR THE AXELERA EMBEDDED 110M	12
5.1 M.2 ACTIVE COOLING SOLUTION –ALUMINUM HEATSINK WITH FAN	12
5.1.1 AXELERA EMBEDDED 110M ACTIVE COOLING SOLUTION – COOLING CAPACITY	15
5.2 M.2 PASSIVE COOLING SOLUTION – FANLESS SYSTEM WITH EMBEDDED ALUMINUM HEAT SPREADER	17
5.2.1 AXELERA EMBEDDED 110M PASSIVE COOLING SOLUTION – COOLING CAPACITY	19
5.3 PASSIVE COOLING SOLUTION WITH FORCED AIRFLOW	21
6 APPENDIX	22
6.1 3D MODEL DOCUMENTS	22
6.2 2D DRAWINGS	22
7 LEGAL NOTICE	23

1 Introduction and scope

This document provides thermal design considerations, specifications, and recommended solutions to optimize heat dissipation for the Axelera Embedded 110m. It outlines key thermal requirements, passive and active cooling approaches, and integration guidelines for different system configurations. The goal is to assist engineers and system integrators in implementing a robust and efficient cooling solution, ensuring sustained and stable high-performance AI inference.

1.1 Recommended reading

The Axelera Embedded 110m has a single Axelera AI Metis AIPU (AI processing unit) chip and a minimum of 1 GB of LPDDR4X dedicated memory. It is designed to provide AI inference acceleration in any system that has an M.2 card socket, also known as Next Generation Form Factor (NGFF) socket.

In order to integrate the Axelera Embedded 110m, the following steps are recommended:

- **Review** the *Axelera Embedded 110m Datasheet* and the provided 3D model to verify that your system is compatible with the Axelera Embedded 110m.
- **Read and understand this document:** *Axelera Embedded 110m Thermal Design Guide*.
- **Implement the appropriate thermal solution** based on the information provided in this document to ensure the temperature of the components in the module remain below the specified limits in *Table 2: Critical component list for heat generation*.

1.2 Glossary

Term	Definition
AIPU	AI Processing Unit
AL	Aluminum
CFM	Cubic Feet per Minute
FR4	Flame Retardant. FR4 is a type of glass epoxy used in the Axelera Embedded 110m PCB.
LPDDR	Low Power Double Data Rate. Type of memory used in the Metis AIPU.
NGFF	Next Generation Form Factor. Former name for the M.2 expansion card.
PC	Polycarbonate, when used in the context of Thermal Interface Materials.
PVT	Process, Voltage, Temperature
RP2040	A model of Raspberry Pi microcontroller.
SoC	System-on-Chip
TIM	Thermal Interface Materials

2 About the Axelera Embedded 110m

The Axelera Embedded 110m generates heat during operation, necessitating an effective thermal management solution to maintain performance, reliability, and longevity. Proper thermal design is crucial to preventing thermal throttling, performance degradation, or even hardware shutdown under extreme conditions.

Table 1 provides some key thermal and operational specifications of the Axelera Embedded 110m. For full specification details, refer to the *Axelera Embedded 110m Datasheet*.

Table 1: Key thermal and operational specifications of the Axelera Embedded 110m

Specification	Description
Operating Temperature	-20 to 70 °C
Thermal Solution	Options*: - Axelera supplied heatsink with a fan (active cooling) - Custom heat spreader
Typical Power	3.5 – 9.5 W

** Additional options will be proposed in future revisions of this document*

3 Metis AIPU characteristics and protection

The Axelera Embedded 110m features one Axelera AI Metis AIPU system-on-chip (SoC).

3.1 Metis AIPU characteristics

The Metis AIPU has the following characteristics:

Symbol	Definition	Recommended maximum value*	Absolute maximum value
T_j	Junction temperature	95°C	125°C

* To guarantee operating lifetime.

Symbol	Definition	Value
θ_{jc}	Junction-to-case thermal resistance	0.22°C/W

3.2 Thermal throttling and thermal safety

The Metis AIPU has the following features:

- Throttling mechanisms that can be used to reduce power dissipation by controlling peak performance.
- Thermal protection mechanisms to prevent damage to the chip.

These mechanisms include both software and hardware protections and they activate according to temperature thresholds. The mechanisms are triggered based on temperature data read from PVT sensors (process, voltage, temperature sensors), placed across key areas of the chip as well as sensors placed on the board.

Future revisions of this document will document these mechanisms in detail.

4 Thermal characteristics of Axelera Embedded 110m

The Axelera Embedded 110m is designed with a system-level thermal solution to efficiently dissipate heat generated during high-performance AI inference workloads. The primary heat dissipation path is through the top surface of the AIPU, where it can be conducted to a heatsink or other cooling solution. However, additional heat dissipation also occurs through other key components, including the LPDDR, the MPM3695 and MP5416 voltage regulators, and the PCB board.

While these secondary heat paths contribute to overall thermal management, the majority of heat is dissipated from the AIPU to the top surface. For this reason, an optimized thermal solution must focus on effective heat transfer from the AIPU to ambient air through a properly designed cooling system.

4.1 Power distribution and heat dissipation considerations

The power consumption of the Axelera Embedded 110m varies depending on the workload distribution across the AIPU, LPDDR, and voltage regulators. Efficient thermal management depends on ensuring proper heat spreading across these components to avoid localized hotspots.

To achieve optimal thermal performance, the following considerations must be considered:

- **AIPU (Primary heat source):** Most of the heat is generated by the AIPU and must be dissipated efficiently through a direct heatsink or a passive heat conduction system.
- **LPDDR memory:** Although it generates less heat than the AIPU, the LPDDR memory still contributes to thermal load and should be included in thermal analysis.
- **Voltage regulators (MPM3695 and MP5416):** These components add to the overall power dissipation and should be considered when designing heat dissipation solutions.
- **PCB board heat transfer:** While a proportion of the heat is transferred through the PCB, this is a secondary dissipation path and should not be solely relied upon for cooling.

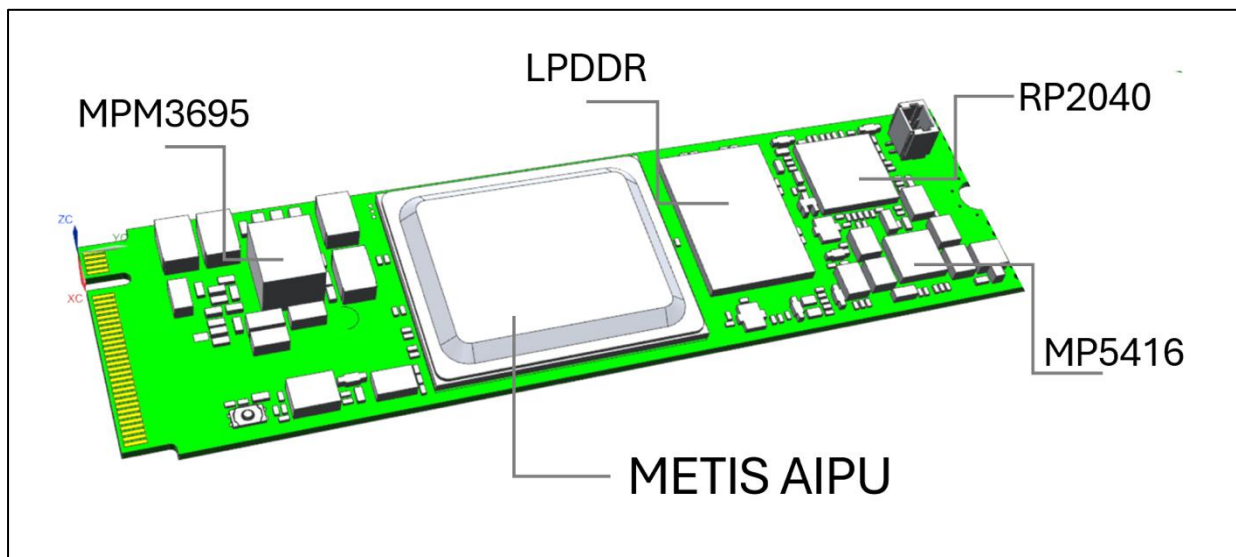


Figure 1: Critical component placement for the heat generation

Table 2: Critical component list for heat generation

Axelera Embedded 110m: Key components	Power consumption (W)	Thermal resistance value (°C/W)	Allowable max. temperature (°C)
Metis AIPU	1.9-7.9 W*	R _{J-C} = 0.22 / R _{J-B} = 2.86 / R _{J-A} = 8.97	**95 (T _j)
LPDDR4X	1.1 W	R _{J-C} = 7.6 / R _{J-B} = 16.9	95 (T _c)
MPM3695	1 W	R _{J-A} = 14.1 / R _{C-B} = 4.8	125 (T _j)
MP5416	1 mW	R _{J-A} = 44 / R _{C-B} = 9	125 (T _j)

* Power consumption depends on the specific scenario and neural network at different ambient temperatures.

** 95°C is recommended by Axelera AI as the “max. working temperature” to guarantee the operating lifetime.

Note: T_j = junction temperature and T_c = case temperature.

4.2 Thermal resistance model

The thermal behavior of the Axelera Embedded 110m can be represented using a thermal resistance network, similar to other electronic systems. The *junction temperature* (T_j) is related to the *ambient temperature* (T_a) through the following equation:

$$T_j = T_A + (R_{Total} \times P)$$

$$R_{Total} = R_{j-c} + R_{TIM} + R_{Heatsink}$$

Parameters:

- **T_j** = Metis AIPU junction temperature
- **T_A** = Ambient air temperature
- **P** = Power dissipated by the module
- **R_(j-c)** = Thermal resistance from junction to AIPU package top surface
- **R_(TIM)** = Thermal resistance of TIM (thermal interface materials). This depends on the thermal selection of the material of TIM. For details, see *Table 5: Suggested thermal interface material*.
- **R_(Heatsink)** = Thermal resistance of Heatsink (depends on the thermal selection of the material and the heatsink design and the ambient flow rates. For details, see section 5 *Thermal solution options for the Axelera Embedded 110m*.

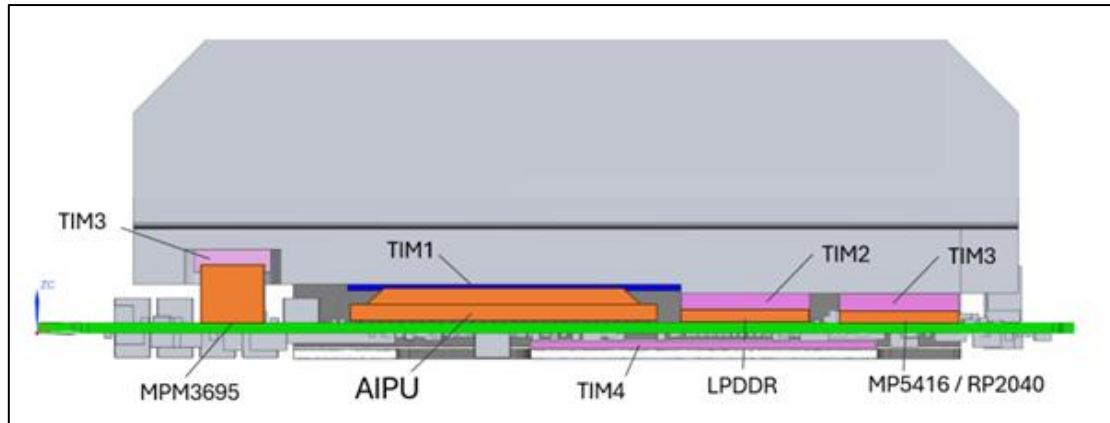


Figure 2: Stack-up of Axelera Embedded 110m (cross-section of AI Heatsink Solution with TIM materials)

The thermal resistance network of the AIPU to ambient is shown in Figure 3. The network diagram is the same as for the other critical heat generated components.

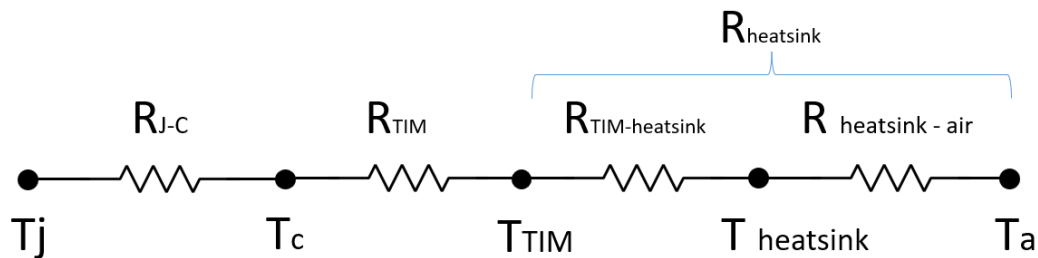


Figure 3: Axelera Embedded 110m thermal resistance network diagram

According to the thermal specifications that are defined in the *Table 2: Critical component list for heat generation*, junction temperatures can be calculated. See the following example.

Example Case: Thermal calculations

This example is for the Metis AIPU chip with the given thermal resistance values.

In this example, using a 0.5 mm-thick thermal pad with a thermal conductivity of 9 W/mK between the chip and an aluminum heatsink, we need to determine the appropriate heatsink selection. Given a power consumption of 6 W and a requirement to keep the junction temperature below 95°C, we must calculate the necessary thermal resistance of the aluminum heatsink to ensure proper cooling. The air flow assumed to be constant as max. 0.5 m/s, such as in a closed system structure.

Parameters:

- T_j = Junction temperature of the Metis AIPU
- T_a = Ambient temperature
- P = Power dissipation of the AIPU
- R_{Heatsink} = Thermal resistance from the Heatsink (to be calculated)
- R_{j-c} = Thermal resistance of AIPU junction to case
- k_{TIM} = Thermal Conductivity of TIM
- R_{TIM} = Thermal Resistance value of the TIM material (to be calculated)
- t_{TIM} = TIM material thickness
- A_{TIM} = Area of the Thermal Pad

Example case:

- $T_a = 70^\circ\text{C}$
- $T_j = 95^\circ\text{C}$ (with reference to allowable AIPU junction temperature)
- $P = 6\text{ W}$
- $R_{j-c} = 0.22^\circ\text{C/W}$
- $k_{TIM} = 9\text{ W/mK}$
- $t_{TIM} = 0.5\text{ mm} = 0.0005\text{ m}$
- $A_{TIM} = 20 \times 24\text{ mm} = 0.00048\text{ m}^2$

Establish Thermal Resistance Path:

Since we are using an aluminum heatsink on top of the chip with a thermal pad, the primary heat flow path is:

Junction $\rightarrow$ Case $\rightarrow$ TIM $\rightarrow$ Heatsink $\rightarrow$ Air

The total thermal resistance R_{total} must satisfy the temperature requirement:

$$R_{total} = \frac{T_j - T_a}{P} \quad (1)$$

To ensure $T_j \leq 95^\circ\text{C}$ with $T_a = 70^\circ\text{C}$:

$$R_{Total} = \frac{95 - 70}{6} = 4.16^\circ\text{C/W}$$

Which means; the total system resistance shouldn't be more than 4.16°C/W to keep the AIPU temperature under 95°C at 70°C ambient.

Thermal Pad Resistance (R_{TIM}):

$$R_{TIM} = \frac{t}{K * A} \quad (2)$$

$$R_{TIM} = \frac{0.0005}{9 \times 0.00048} = 0.116^\circ\text{C/W}$$

To choose the correct heatsink, we can calculate the required heatsink thermal resistance:

$$R_{total} = R_{j-c} + R_{TIM} + R_{heatsink} \quad (3)$$

$$4.16 = 0.22 + 0.116 + R_{heatsink}$$

$$R_{heatsink} = 4.16 - 0.22 - 0.116$$

$$R_{heatsink} = 3.82\text{ }^{\circ}\text{C/W}$$

If a similar heatsink is used, a thermal resistance $\leq 3.82^{\circ}\text{C/W}$ is required to keep the AIPU temperature within safe limits and the system can safely dissipate up to 6 W without exceeding thermal limits at 70°C ambient temperature.

If the power increased to 10 W, then the equation for total system resistance, (1), becomes:

$$R_{Total} = \frac{95 - 70}{10} = 2.5\text{ }^{\circ}\text{C/W}$$

To choose the correct heatsink, we can calculate the required heatsink thermal resistance, according to equation (3):

$$R_{heatsink} = 2.5 - 0.22 - 0.116$$

$$R_{heatsink} = 2.16\text{ }^{\circ}\text{C/W}$$

If a heatsink is used with a thermal resistance $\leq 2.16^{\circ}\text{C/W}$, the system can safely dissipate up to 10 W without exceeding thermal limits. In this kind of case, Axelera AI recommends active cooling solutions or an additional cooling plate that is attached to top of the “Axelera Heat Spreader” in the system. For more information please refer to section 5 *Thermal solution options for the Axelera Embedded 110m*.

NOTE: Heatsink selection must be considered carefully when configuring system power. This example only considers AIPU heat dissipation as the main heat source in the system. Therefore, please also take into account other heat sources in the system to ensure a proper selection. Refer to Table 2: Critical component list for heat generation to keep the system within safe limits.

5 Thermal solution options for the Axelera Embedded 110m

To prevent the Metis AIPU from reaching critical operating temperatures, several thermal management solutions are proposed to ensure optimal performance and reliability. The design goal of the different solutions is to keep the chip and the critical component's junction temperature within the specified range.

5.1 M.2 Active Cooling Solution –Aluminum heatsink with fan

In this configuration, the M.2 Active Cooling Solution consists of an aluminum heatsink cooled with forced air from a fan. It is suitable for the following scenario:

- The M.2 slot area has enough height clearance for proper fan air flow : 50 mm from the board surface to upper surface.
- The host systems may or may not have forced airflow.
- With forced airflow (2 m/s), it is suitable for high-power workloads up to 11 W that require to operate at 70°C ambient.
- Low Thermal resistance values from 2°C/W to 3.5°C/W (for 0.5 and 2m/s of airflow respectively).
- Can tolerate noise level of fan: ≈ 20 dB (according to fan flow-0.78 CFM measured from a distance of 1 m).

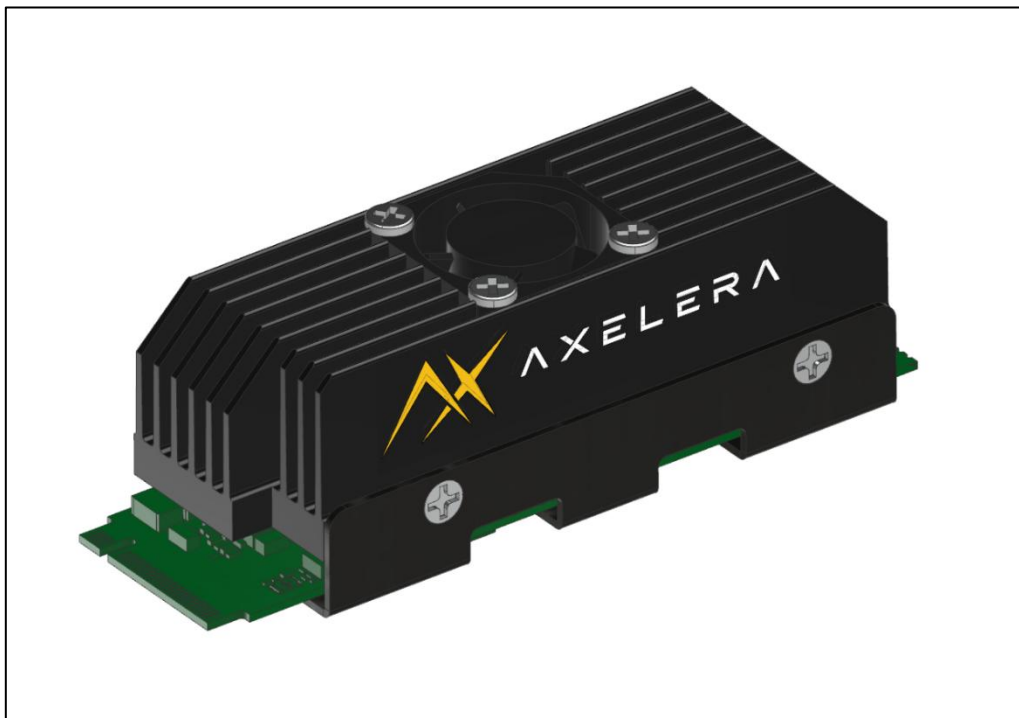


Figure 4: M.2 Active Cooling Solution (heatsink with fan forced air)

Table 3: Product specifications for the Axelera Embedded 110m Active Cooling Solution

Part name	Total Length (w-card / Heatsink-only)(mm)	Height to top of the heatsink (mm)	Width (mm)	Weight (g)	Thermal Resistance Values		Total Cooling Capacity (W)*
					(Under constant air flow ≤ 0.5 m/s)	(With additional fan in the system- air flow of 2.0 m/s)	
Active Cooling	80 / 72.5	12	25	30	~ 3.5 (°C/W)	~ 2.0 (°C/W)	6.5 to 11

* Max. Power defined in accordance with preventing reaching $T_j=95^{\circ}\text{C}$ at 70°C ambient temperature.

For more information on dimensions, please refer to the document *Axelera Embedded 110m Datasheet*.

Parts list for the Axelera Embedded 110m Active Cooling Solution

The Axelera Embedded 110m Active Cooling Solution consists of the following parts, as shown in Table 4.

Table 4: Parts list for the Axelera Embedded 110m Active Cooling Solution

Part name	Material type	Material Info	Quantity
Axelera Embedded 110m	FR4	0.8 mm	1
AL Heatsink	AL6000 / Anodized aluminum	n/a	1
Fan (Axial) 3.3 V	Polycarbonate (PC)(V0-certified)	0.78 CFM air flow	1
Screw of Fan	M2 x 14 mm	n/a	3
Screw (x4)	M2.5 x 5 mm	n/a	4
Bracket Bottom	Sheetmetal / Powder coating	1 mm	1
Thermal Pad-TIM	Refer to Table 5.	0.5 – 2 mm	4
Isolation Plate-Mylar	A3 PC1870A+3M9448 (adhesive tape)	0.275 mm	1

For the thermal pads (TIM) in the system, thermal values are as shown in Table 5.

Table 5: Suggested thermal interface materials (TIM)

Axelera Embedded 110m key thermal components	Material type	Material thickness (mm)	Thermal conductivity coefficient value (K= W/mK)	Allowable max working temperature (°C)
TIM1 / AIPU	VOT- XK9	0.5 mm	9	150
TIM2 /	VOT- A6S2	2.0 mm	1.8	200
TIM3	VOT- A6S2	1.75 mm	1.8	200
TIM4	VOT- A6S2	0.75 mm	1.8	200

Refer also to Figure 2: Stack-up of Axelera Embedded 110m (cross-section of AI Heatsink Solution with TIM materials).


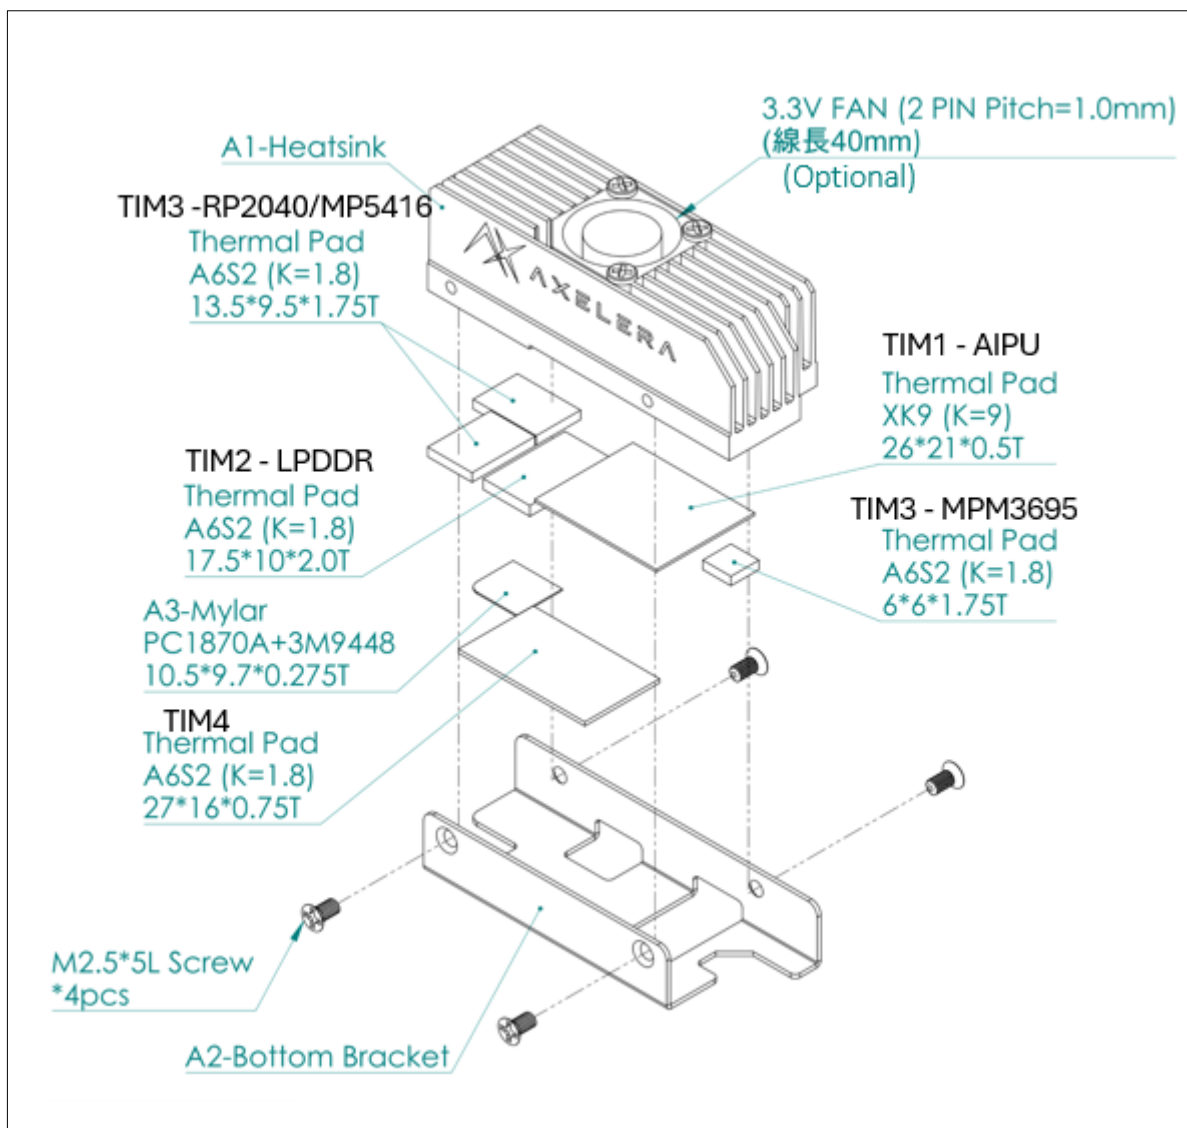


Figure 5: Exploded view of the Active Cooling solution

5.1.1 Axelera Embedded 110m Active Cooling Solution – Cooling capacity


In this configuration, the Axelera Embedded 110m Active Cooling Solution is fixed in a closed structure that allows free air ventilation for proper fan working. When the inside air flow is less than 0.5 m/s, the heatsink resistance value is assumed to be around 3.5°C/W (with fan air flow of 0.78 CFM).

Under these conditions, considering the TIM materials (refer to Table 5: Suggested thermal interface materials) and the Metis junction to case resistance (0.22/W) the total resistance to be 3.84°C/W and the thermal path as shown in the following:

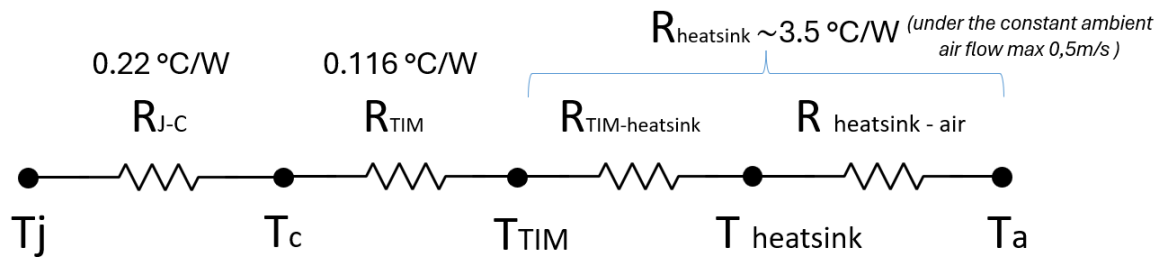

External fan conditions:

If the open frame structure has an internal fan and the air flow rate is a minimum of 2 m/s, it is possible to reduce the heatsink resistance values to around 2°C/W. In this case, the total resistance will be 2.34°C/W and the thermal path is given from the following:

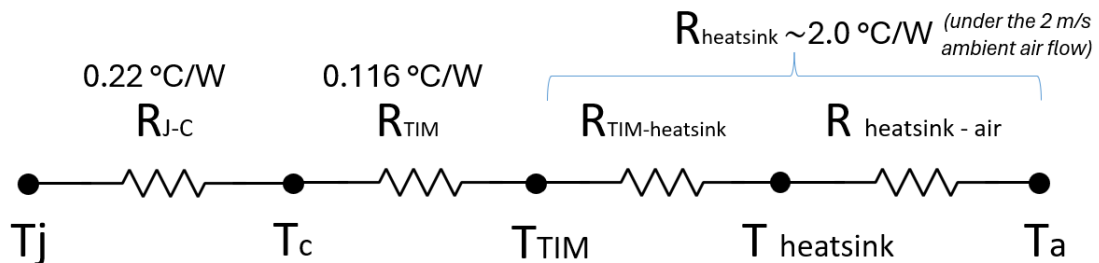

According to that configuration, the Axelera Embedded 110m Active Cooling Solutions can reach to 6.5 W (at 70°C, at 0.5m/s natural air flow) or up to 11 W (at 70°C at 2 m/s forced air flow) cooling capacity. See Figure 6.

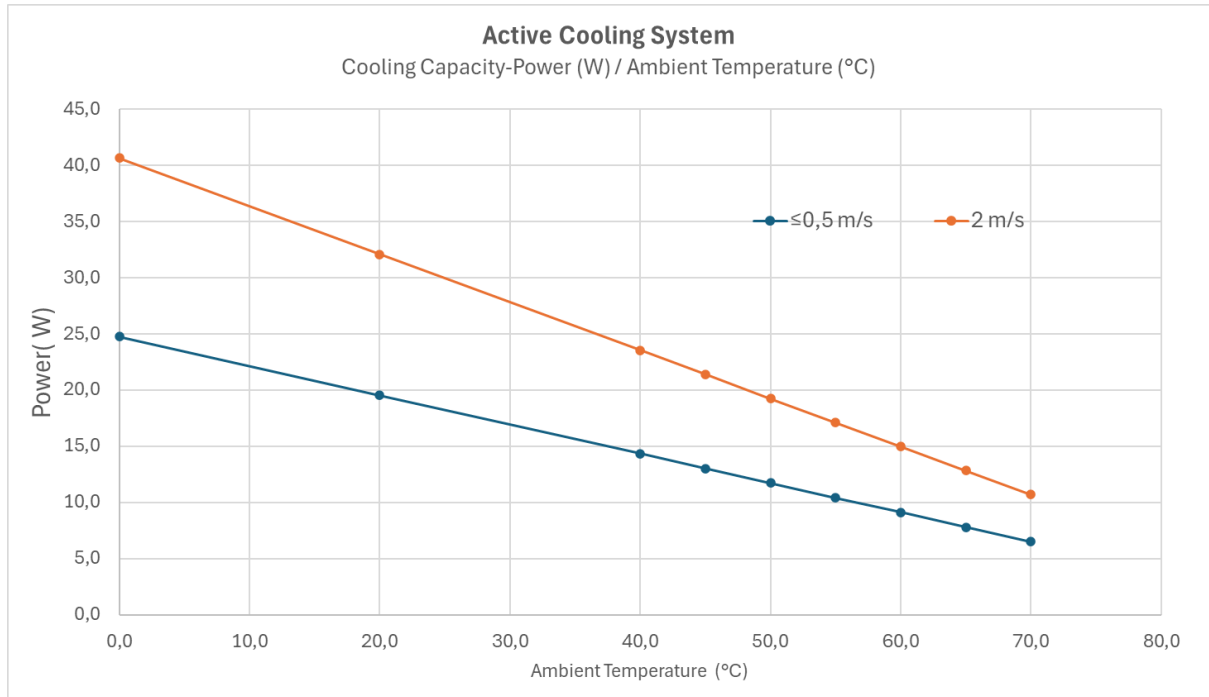


Figure 6: Cooling capacity of Active Cooling solution in different ambient temperatures and different air flows at ambient air-flow rate (max 0.5 m/s) and 2 m/s air-flow rate

5.2 M.2 Passive Cooling solution – Fanless system with embedded aluminum heat spreader

The Axelera Embedded 110m Passive Cooling Solution with an embedded aluminum heat spreader is the preferred solution for fan-less embedded systems with space constraints. It has the following characteristics:

- In embedded systems, if there is a space between main heatsink and the Axelera Embedded 110m board, the aluminum heat spreader solution can be used as a heat transfer component from the Axelera Embedded 110m board to the external enclosure.
- Provides efficient heat dissipation for compact and fan-less designs.
- Suitable for lower power applications and critical small spaces as 12 mm height (total module height of 6 mm from top of the Metis AIPU).

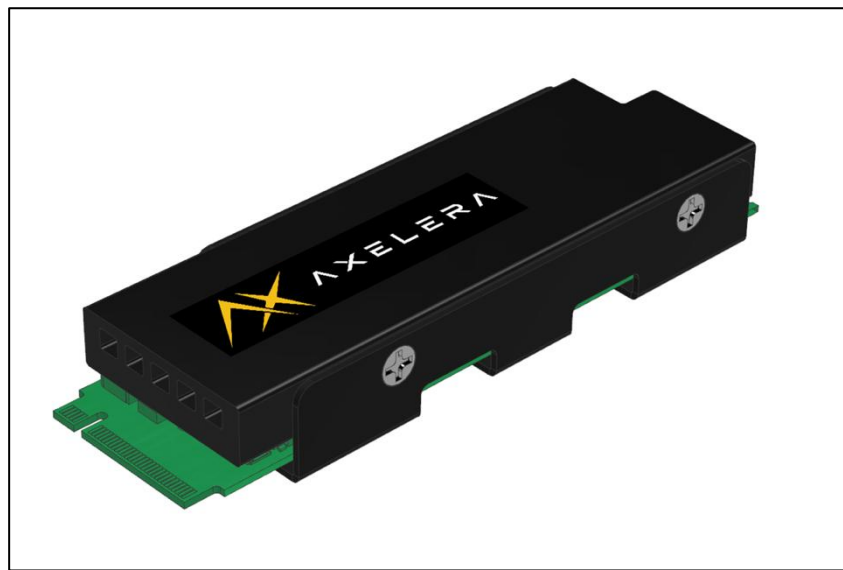


Figure 7: Rendering of the Axelera Embedded 110m with an example heat spreader. Heat spreader not supplied by Axelera.



Figure 8: Example of a fan-less embedded system

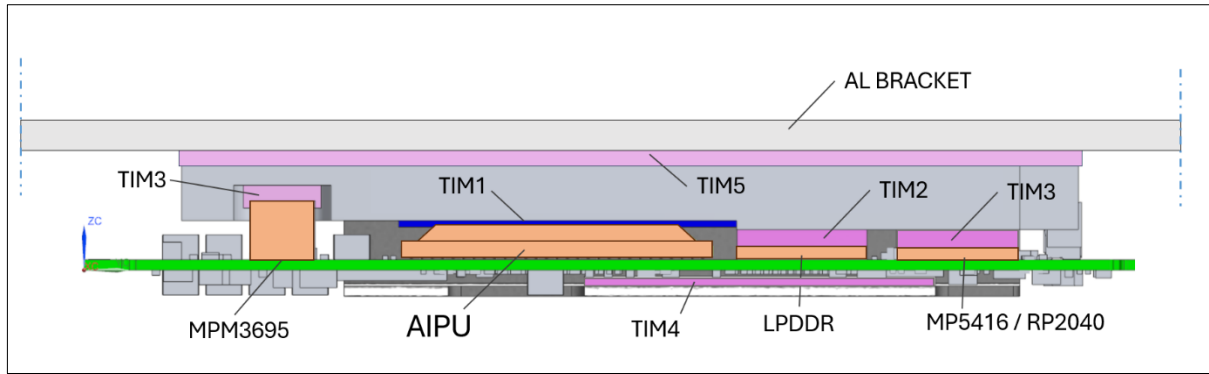


Figure 9: Stack-up of the Axelera Embedded 110m Passive Cooling solution showing the heat spreader in an embedded fan-less system

The thermal values are as following according to standalone and with an additional cooling plates.

Table 6: Product specifications of Axelera Embedded 110m Passive Cooling Solution with embedded heat spreader

Part name	Total Length (w-card/Heatsink-only) (mm)	Height to top of the heatsink (mm)	Width (mm)	Weight (g)	Thermal Resistance Values		Total Cooling Capacity (W)
					Standalone	In case of attached to 200x250 mm, 2 mm thick Al Cooling Plate *	
Heat Spreader / Passive Cooling	80 / 72.5	12	25	25	~ 8.3(°C/W) (under forced air flow of 3 m/s)	~ 3.3(°C/W) (constant Air flow of max 0.5 m/s)	3 to 7.4

* For the attached cooling plate, a TIM material (1 mm thick, 1.8 W/mK thermal conductivity) between Aluminum Heat spreader and Cooling Plate is considered.

Parts List for the Axelera Embedded 110m Passive Cooling Solution

The Axelera Embedded 110m Passive Cooling Solution consists of the following parts as shown in Table 7.

Table 7: Parts list for the Axelera Embedded 110m Passive Cooling Solution with embedded aluminum heat spreader

Part name	Material type	Material thickness (mm)	Qty
Axelera Embedded 110m PCB	FR4	0.8 mm	1
AL Heat Spreader	AL6000 / Anodized aluminum	n/a	1
Screw (x4)	M2.5 x 5mm	n/a	4
Bracket Bottom	Sheetmetal / Powder coating	1 mm	1
Thermal Pad-TIM1/2/3/4	Refer to Table 5.	0.5 – 2 mm	4
Thermal Pad-TIM 5	VOT- A6S2	1 mm	1
Isolation Plate-Mylar	A3 PC1870A+3M9448	0.275 mm	1

5.2.1 Axelera Embedded 110m Passive Cooling Solution - Cooling Capacity

If the embedded structure has an internal fan and the air flow rates is a minimum of 3 m/s, the Heat Spreader Solution can be usable under the following ambient temperature. Under these conditions, the total system thermal resistance value will be 8.3°C/W.

To improve power, Axelera AI recommends using the heat spreader with an additional aluminum plate (For example an aluminum plate 200x250 mm 2 mm-thick) and fixed with a 1.8

W/mK thermal pad. In this assembly configuration, the total resistance will be $3.3^{\circ}\text{C}/\text{W}$ under the natural convection conditions (natural convection - max air flow 0.5 m/s).

According to test results, the Axelera Embedded 110m Embedded Aluminum Heat Spreader Solution can reach 7.4 W (at 70°C) cooling capacity with an additional cooling plate in the embedded system.

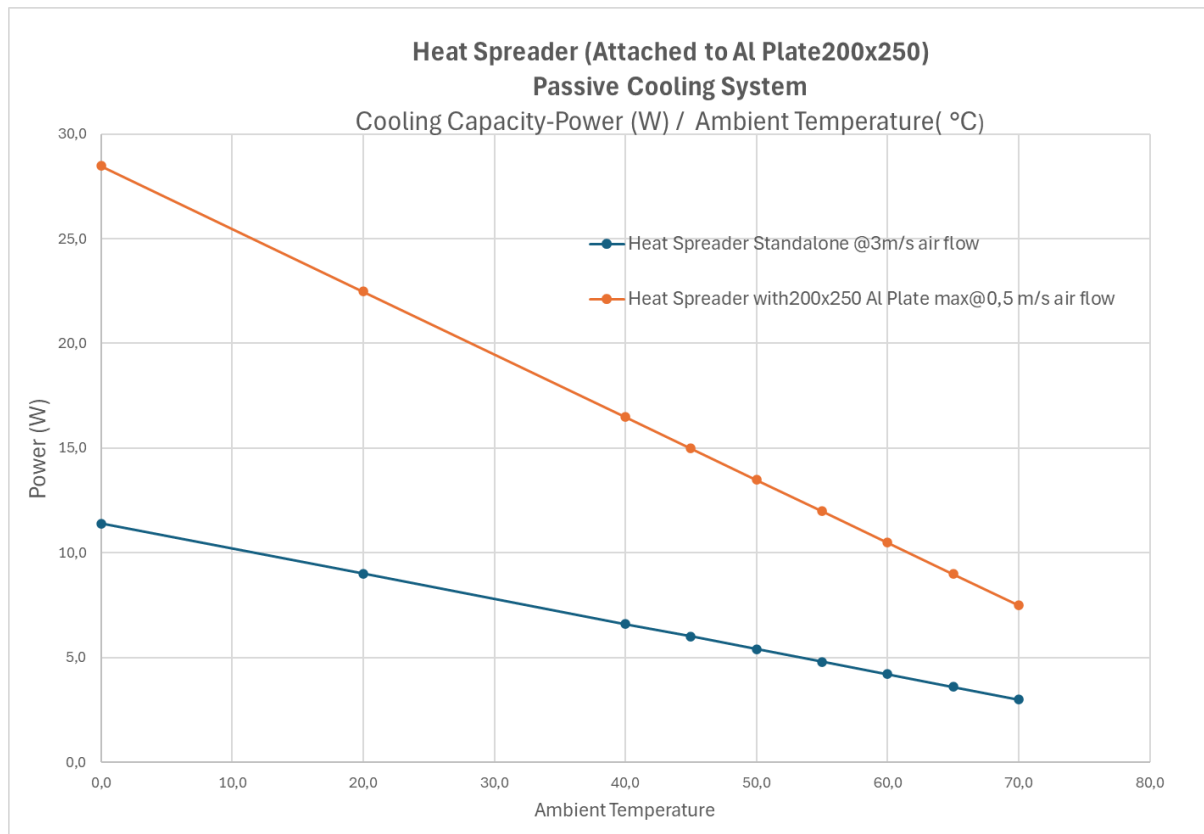


Figure 10: Cooling Capacity of Heat Spreader Solution-Embedded System Solutions in different Ambient Temperatures

5.3 Passive cooling solution with forced airflow

Future revisions of this document will also include the characterization of a system that uses a passive heatsink on the Axelera Embedded 110m card with forced airflow at the system level.

6 Appendix

6.1 3D model documents

Information is provided in the following IGS documents:

- **Axelera Embedded 110m Board Standalone (No Cooling)**
 - Axelera Embedded 110m – No Cooling Solution
- **Axelera Embedded 110m Active Cooling Solution**
 - Axelera Embedded 110m – Active Cooling Solution

6.2 2D drawings

Please refer to the *Axelera Embedded 110m Datasheet* for 2D drawings of the Axelera Embedded 110m.

7 Legal notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. Axelera AI BV ("Axelera") makes no representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. Axelera shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any Material (defined below), code, or functionality.

Axelera reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice.

Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

AXELERA products are sold subject to the Axelera standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of Axelera and the Customer ("Terms of Sale"). Axelera hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the Axelera product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

Axelera products are not designed, authorized, or warranted to be suitable for use in medical, military, aircraft, space, or life support equipment, nor in applications where failure or malfunction of the Axelera product can reasonably be expected to result in personal injury, death, or property or environmental damage. Axelera accepts no liability for inclusion and/or use of Axelera products in such equipment or applications and therefore such inclusion and/or use is at customer's own risk.

Axelera makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by Axelera. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product. Weaknesses in customer's product designs may affect the quality and reliability of the Axelera product and may result in additional or different conditions and/or requirements beyond those contained in this document. Axelera accepts no liability related to any default, damage, costs, or problem which may be based on or attributable to: (i) the use of the Axelera product in any manner that is contrary to this document or (ii) customer product designs.

No license, either expressed or implied, is granted under any Axelera patent right, copyright, or other Axelera intellectual property right under this document. Information published by Axelera regarding third-party products or services does not constitute a license from Axelera to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party, or a license from Axelera under the patents or other intellectual property rights of Axelera.

Reproduction of information in this document is permissible only if approved in advance by Axelera in writing, reproduced without alteration and in full compliance with all applicable export laws and regulations, and accompanied by all associated conditions, limitations, and notices.

THIS DOCUMENT AND ALL AXELERA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." AXELERA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL AXELERA BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF Axelera HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Notwithstanding any damages that customer might incur for any reason whatsoever, Axelera's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms of Sale for the product.

Trademarks

The Axelera "AX" logo is a trademark of Axelera AI BV, registered in the Netherlands and other countries. "AXELERA" and "METIS" are registered as word marks across a number of countries/regions. Other company and product names may be trademarks of the respective companies with which they are associated.