



AXELERA
ARTIFICIAL INTELLIGENCE

Axelera Server 150p Datasheet

2026-08-03
AX-000910-DS-3
Version: Issue 3

Copyright © | 2026 | Axelera AI BV | All rights reserved.

This documentation is protected by copyright and is intended solely for use as provided and in accordance with the applicable license agreement. Unauthorized use, reproduction, or distribution of this documentation, in whole or in part, is strictly prohibited.

Document and proprietary information

Document and information property

This document and the information contained herein are the property of Axelera AI. It must not be reproduced or otherwise disclosed without prior consent from Axelera AI.

Trademarks

The Axelera "AX" logo is a trademark of Axelera AI BV, registered in the Netherlands and other countries. "AXELERA" and "METIS" are registered as word marks across a number of countries/regions.

All other product and company names and registered trademarks may be property of their respective owners.

Document revision history

Revision	Date	Description
1 - PRELIMINARY	2025-09-19	First Issue
2	2026-03-20	Added certification in Table 2 Added passive cooling solution sections 2.2.2 and 2.4.2 and updated part numbers in section 7.
3	2026-08-03	Rebranded product name. Updated weights in Table 2. Updated part numbers in section 7. (Removed security section 2.5)

TABLE OF CONTENTS

DOCUMENT AND PROPRIETARY INFORMATION	2
1 INTRODUCTION	4
1.1 AXELERA SERVER 150P OVERVIEW	5
1.2 KEY FEATURES	6
2 SPECIFICATIONS	7
2.1 BOARD AND PRODUCT CHARACTERISTICS	8
2.2 BOARD MECHANICAL DETAILS	9
2.2.1 ACTIVE COOLING SOLUTION	10
2.2.2 PASSIVE COOLING SOLUTION	11
2.3 CONNECTOR PINOUT	12
2.4 COOLING SOLUTIONS	13
2.4.1 ACTIVE COOLING SOLUTION	14
2.4.2 PASSIVE COOLING SOLUTION	15
3 SAFETY INFORMATION	16
4 INSTALLATION INSTRUCTIONS	17
5 TROUBLESHOOTING	17
6 SUPPORT	17
7 MODEL/PART NUMBERS	18
APPENDIX A PCIe X16 PINOUT	19
LEGAL NOTICE	22

1 Introduction

Metis is Axelera's high-performance AI Processing Unit (AIPU) for edge computing, available in M.2, PCIe, and SBC form factors. Each variant is tailored to meet specific deployment needs, offering a range of chip and memory configurations.

The Axelera Server 150p is a four-chip PCIe solution available in 8/16 GB RAM configurations, designed to deliver powerful AI processing for edge servers.

This datasheet provides instructions and safety information to ensure the Axelera Server 150p can be installed, operated, stored, maintained, repaired, and disposed of safely.

1.1 Axelera Server 150p overview



Figure 1: Axelera Server 150p with active cooling



Figure 2: Axelera Server 150p with passive cooling

1.2 Key features

- The highest-performance AI accelerator PCIe card on the market for edge AI applications. Powered by four Metis AIPUs.
- A single board can run inference on dozens of cameras as well as support multiple parallel neural networks.
- A wide range of end-to-end AI pipelines and models are available out of the box.
- Hassle-free evaluation and SW integration thanks to Axelera AI Voyager SDK.
- Uncompromised prediction accuracy thanks to advanced quantization tools.

2 Specifications

2.1 Board and product characteristics

The tables in this section list the board characteristics, including physical and software characteristics.

Table 1: Axelera Server 150p board characteristics and properties

Specification	Description
Product name	Axelera Server 150p
Main chip	Axelera AI Metis AIPU (AI Processing Unit)
Memory	See section 7 Model/Part numbers
Thermal solution	Active air cooling Passive air cooling
Host interface	PCIe Gen. 3.0, 16-lanes; up to 16 GB/s
Certifications	CE, FCC, ROHS, REACH

Table 2: Axelera Server 150p physical characteristics

Specification	Description
Mechanical form factor	PCIe single slot, full height, three-quarter length
Dimensions	Total length: three-quarters ¹
Weight	712 grams for card with active cooling 702 grams for card with passive cooling
Power Rating	225 W - total board power requirement, including a PCI-SIG compliant slot and a 2 x 4 auxiliary power connector
Thermal Design Power	70 W
Typical Power	30 W - 58 W - typical average power across various workloads using maximum performance profile. This measurement assumes an ambient temperature of 25°C

Table 3: Axelera Server 150p environmental characteristics

Specification	Description
Standard operating temperature (ambient)	0~60°C
Storage temperature	-40~85°C
Storage humidity	0%~85% RH, non-condensing

¹ The actual length is slightly less than three-quarters, see section 2.2, Board mechanical details, for exact dimensions

2.2 Board mechanical details

2.2.1 Active cooling solution

This section provides the package information of the Axelera Server 150p active cooling card. Figure 3 shows the card with its fan-based cooler.

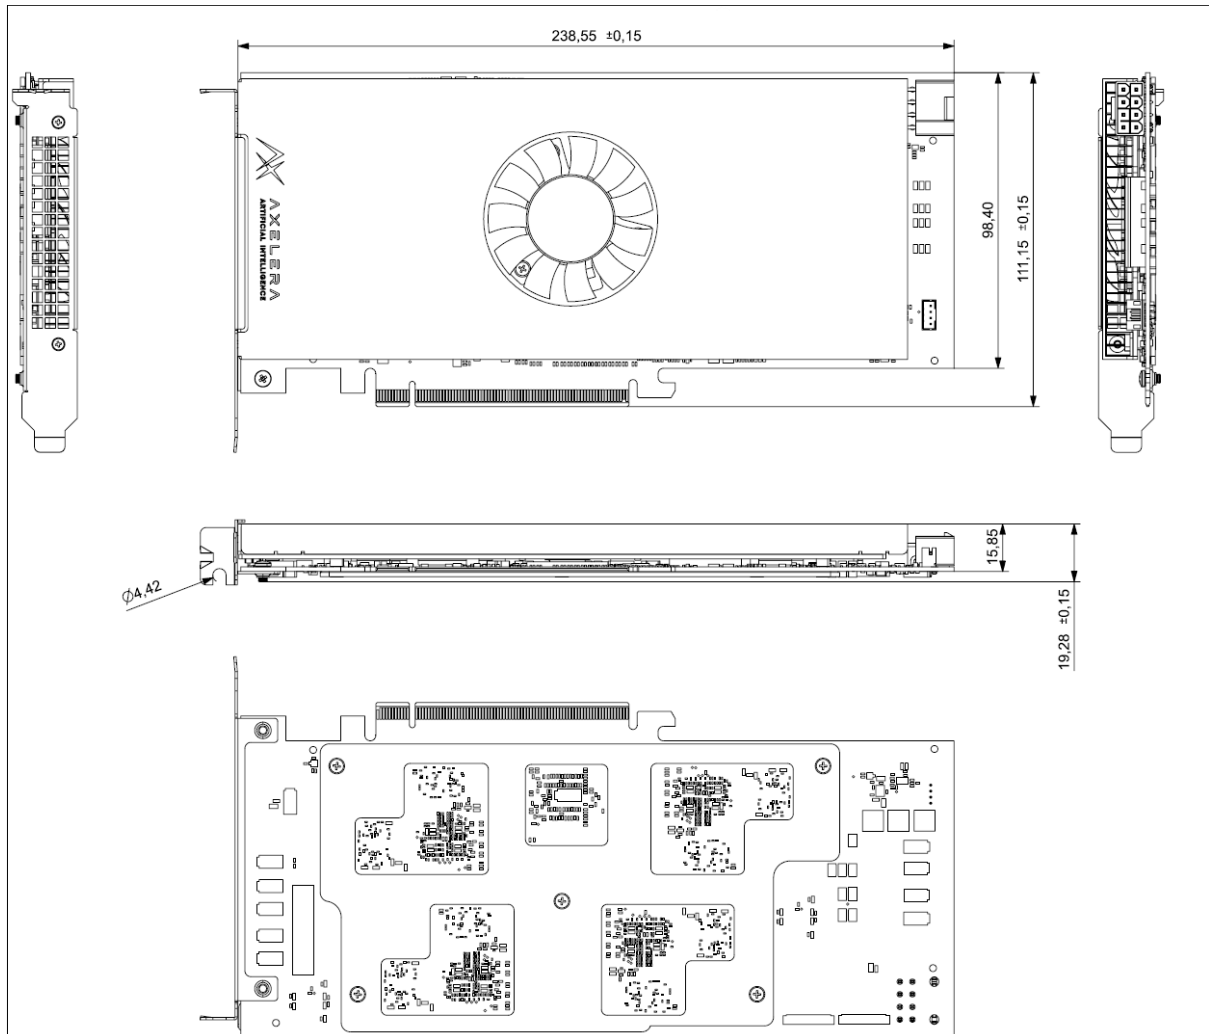


Figure 3: Axelera Server 150p package diagram showing fan-based cooler

Table 4 provides the package mechanical dimensions for the active and passive cooling variants of the Axelera Server 150p.

Table 4: Axelera Server 150p dimensions

Item	Dimensions (mm)
Total length	238.55
Width (front)	111.15
Total height	19.28

2.2.2 Passive cooling solution

This section provides the package information of the Axelera Server 150p passive cooling card. Figure 4 shows the card with its passive cooling solution.

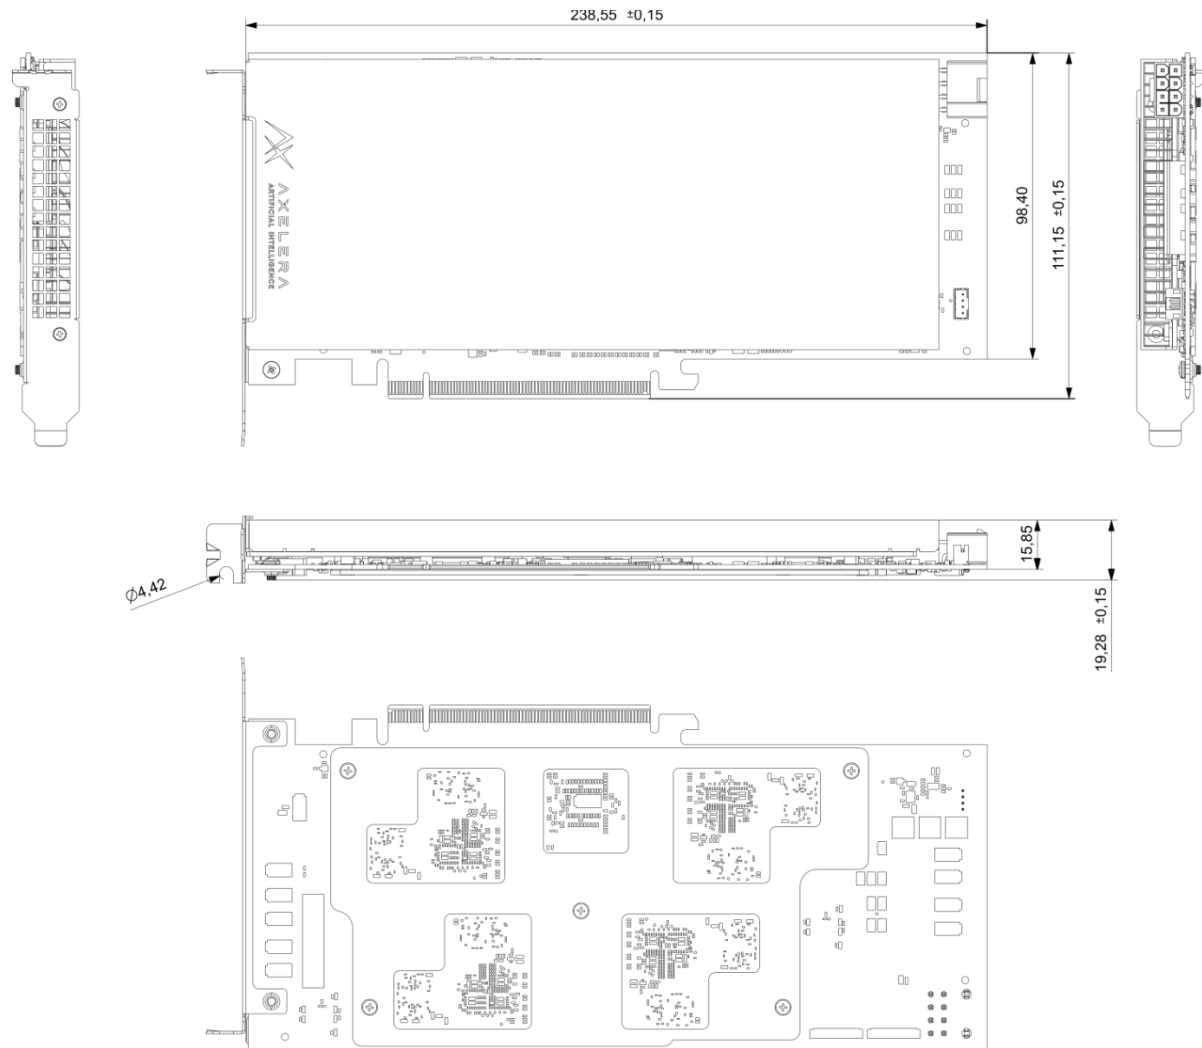


Figure 4: Axelera Server 150p package diagram showing passive cooler

2.3 Connector pinout

For pinouts refer to:

- Appendix A PCIe x16 Pinout for connector pinouts

2.4 Cooling solutions

2.4.1 Active cooling solution

The Axelera Server 150p uses a fan-based cooler, the fan dissipates hot air as depicted in Figure 5.

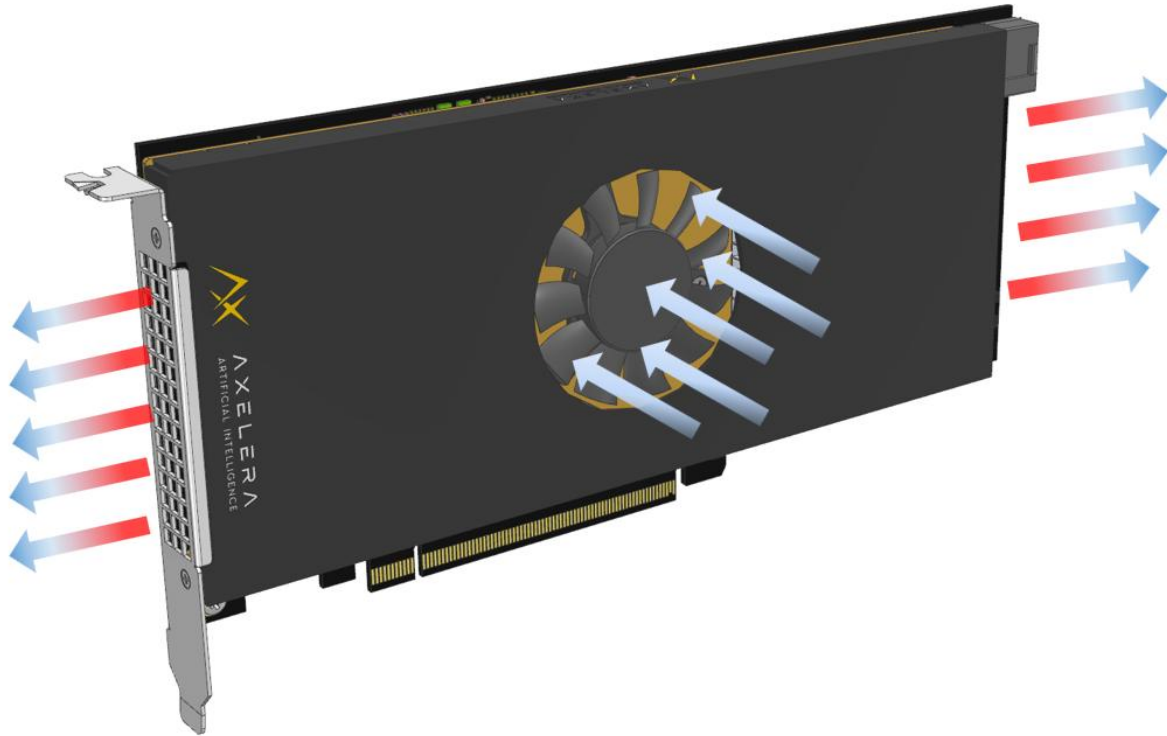


Figure 5: Air flow directions for the Axelera Server 150p with a fan-based cooler.

Table 5 shows the fan characteristics of the fan-based cooler.

Table 5: Fan characteristics of Axelera Server 150p

Fan dimensions	55 x 55 x 10
Voltage	12V
Power consumption	3.12 W (max 3.6 W)
Speed	5400 RPM
Maximum air flow	19 CFM
Air pressure	4.4 mmH2O

2.4.2 Passive cooling solution

The Axelera Server 150p passive cooling solution relies on system-generated longitudinal airflow. Air enters through the rear intake aperture, flows beneath the heatsink shroud across the internal fins, and exhausts through the front bracket ventilation slots. The shroud must remain installed during operation to maintain the intended airflow path.

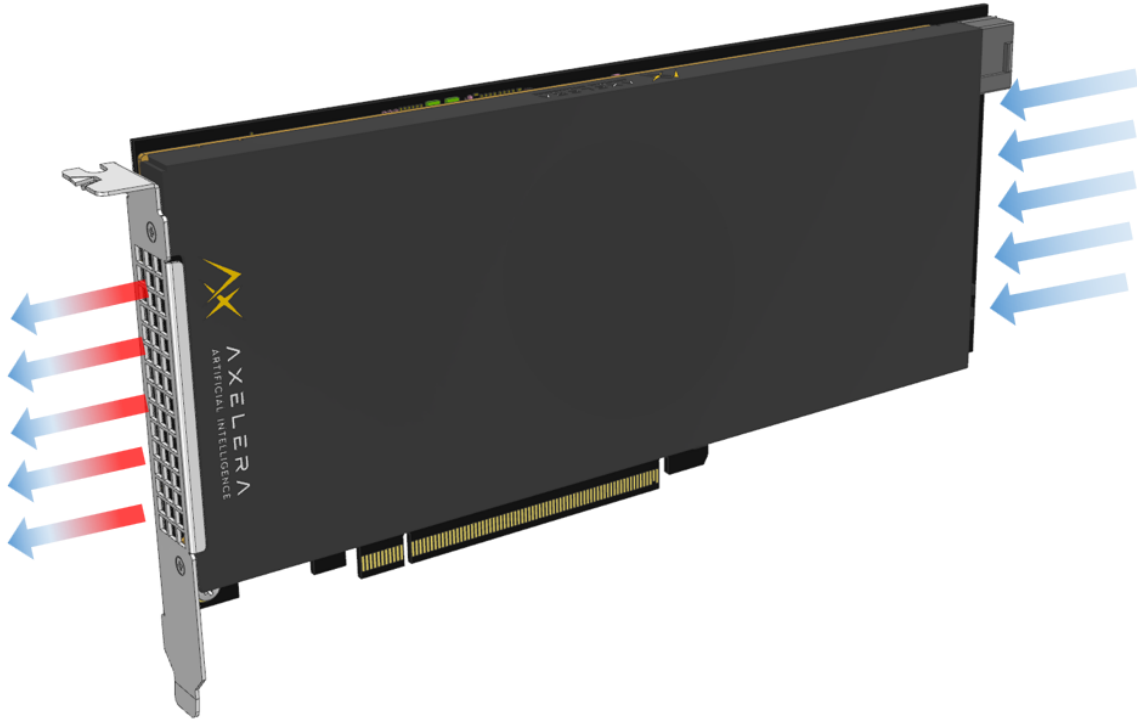


Figure 6: Air flow directions for the Axelera Server 150p with the passive cooling solution

3 Safety information

Before installing the Axelera Server 150p and to ensure its safe use, follow these guidelines:

- **General handling:**
 - Handle the card with care to avoid physical damage.
 - Wear an anti-static wrist strap during installation to prevent electrostatic discharge (ESD).
 - Disconnect the power source before handling, installing, or maintaining the product.
- **Installation:**
 - Ensure the card is installed in a PCIe-compliant slot.
 - Verify that the power sources comply with the product's power requirements.
- **Operation:**
 - Do not block the airflow to the fan or heatsink during operation.
 - Monitor system temperatures regularly to prevent overheating.
 - Operate only within the specified ambient temperature range (0 °C to 60 °C).
- **Storage:**
 - Store the product in a dry environment within -40°C to 85°C and 0%–85% relative humidity (non-condensing).
- **Maintenance:**
 - Regularly clean the fan and heatsink to prevent dust buildup.
 - Ensure software and firmware are updated to maintain performance and security.
 - Inspect the card and connectors periodically for signs of wear or damage.
- **Disposal:**
 - Dispose of the product in accordance with local electronic waste regulations.

WARNING: Improper handling, installation, or use may result in injury, equipment damage, or voiding of warranty.

4 Installation instructions

1. **Card installation:**
 - Align the card with the chosen PCIe Gen. 3.0 x16 slot in your system slot and gently insert it.
 - Secure the card using the bracket screws.
2. **Cooling verification:**
 - Ensure the fan is securely attached and unobstructed.
 - Verify airflow in the system chassis.
3. **Power connection:**
 - Connect the PCIe auxiliary power cable from your system to the 2 x 4 connector
4. **Software Setup:**
 - Install the Voyager SDK for model configuration and optimization.

5 Troubleshooting

Issue: The system does not detect the card.

Solution:

1. Verify the card is properly seated in the PCIe slot.
2. Check the system's BIOS/UEFI to confirm PCIe lane availability.

Issue: Overheating during operation.

Solution:

1. Ensure adequate airflow within the chassis.
2. Clean the fan and verify its operation.

6 Support

For further information and support please visit:

- Axelera AI Community: <https://community.axelera.ai/>
- Axelera AI Customer Portal: <https://support.axelera.ai/>
- Axelera AI Documentation Portal: <https://docs.axelera.ai/>

7 Model/Part numbers

The **Model type** of the Axelera Server 150p is **AXE-BME20P4**. Table 6 shows the part numbers for the various configurations of the card.

Table 6: Axelera Server 150p – part numbers

Part number	Description
AXE-BME20P4BJ08A01	Axelera Server 150p. PCIe card, 4x Metis AIPUs, 8 GB, active cooling, Rev 1.0
AXE-BME20P4BK08C01	Axelera Server 150p. PCIe card, 4x Metis AIPUs, 8 GB, passive cooling, Rev 1.0
AXE-BME20P4AC16A01	Axelera Server 150p. PCIe card, 4x Metis AIPUs, 16 GB, active cooling, Rev 1.0

Appendix A PCIe x16 Pinout

Table 7: Axelera Server 150p connector pinout and signals shows the connector pinout for the Axelera Server 150p alongside signals from the Metis AIPU chips.

NOTE: Pins marked in gray are not connected in this implementation.

Table 7: Axelera Server 150p connector pinout and signals

Pin	Name	Pin	Name
B1	+12v	A1	PRSNT#1
B2	+12v	A2	+12v
B3	+12v	A3	+12v
B4	GND	A4	GND
B5	SMCLK	A5	JTAG2
B6	SMDAT	A6	JTAG3
B7	GND	A7	JTAG4
B8	+3.3v	A8	JTAG5
B9	JTAG1	A9	+3.3v
B10	3.3Vaux	A10	+3.3v
B11	WAKE#	A11	PERST#
Mechanical Key			
B12	RSVD	A12	GND
B13	GND	A13	REFCLK+
B14	HSOp(0)	A14	REFCLK-
B15	HSOn(0)	A15	GND
B16	GND	A16	HSIp(0)
B17	PRSNT#2	A17	HSIn(0)
B18	GND	A18	GND
B19	HSOp(1)	A19	RSVD
B20	HSOn(1)	A20	GND
B21	GND	A21	HSIp(1)
B22	GND	A22	HSIn(1)
B23	HSOp(2)	A23	GND
B24	HSOn(2)	A24	GND
B25	GND	A25	HSIp(2)
B26	GND	A26	HSIn(2)
B27	HSOp(3)	A27	GND
B28	HSOn(3)	A28	GND
B29	GND	A29	HSIp(3)
B30	RSVD	A30	HSIn(3)
B31	PRSNT#2	A31	GND
B32	GND	A32	RSVD

Pin	Name	Pin	Name
B33	HSOp(4)	A33	RSVD
B34	HSOn(4)	A34	GND
B35	GND	A35	HSIp(4)
B36	GND	A36	HSIn(4)
B37	HSOp(5)	A37	GND
B38	HSOn(5)	A38	GND
B39	GND	A39	HSIp(5)
B40	GND	A40	HSIn(5)
B41	HSOp(6)	A41	GND
B42	HSOn(6)	A42	GND
B43	GND	A43	HSIp(6)
B44	GND	A44	HSIn(6)
B45	HSOp(7)	A45	GND
B46	HSOn(7)	A46	GND
B47	GND	A47	HSIp(7)
B48	PRSNT#2	A48	HSIn(7)
B49	GND	A49	GND
B50	HSOp(8)	A50	RSVD
B51	HSOn(8)	A51	GND
B52	GND	A52	HSIp(8)
B53	GND	A53	HSIn(8)
B54	HSOp(9)	A54	GND
B55	HSOn(9)	A55	GND
B56	GND	A56	HSIp(9)
B57	GND	A57	HSIn(9)
B58	HSOp(10)	A58	GND
B59	HSOn(10)	A59	GND
B60	GND	A60	HSIp(10)
B61	GND	A61	HSIn(10)
B62	HSOp(11)	A62	GND
B63	HSOn(11)	A63	GND
B64	GND	A64	HSIp(11)
B65	GND	A65	HSIn(11)
B66	HSOp(12)	A66	GND
B67	HSOn(12)	A67	GND
B68	GND	A68	HSIp(12)
B69	GND	A69	HSIn(12)
B70	HSOp(13)	A70	GND
B71	HSOn(13)	A71	GND

Pin	Name	Pin	Name
B72	GND	A72	HSIp(13)
B73	GND	A73	HSIn(13)
B74	HSOp(14)	A74	GND
B75	HSOn(14)	A75	GND
B76	GND	A76	HSIp(14)
B77	GND	A77	HSIn(14)
B78	HSOp(15)	A78	GND
B79	HSOn(15)	A79	GND
B80	GND	A80	HSIp(15)
B81	PRSNT#2	A81	HSIn(15)
B82	RSVD#2	A82	GND

Legal Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. Axelera AI BV ("Axelera") makes no representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. Axelera shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any Material (defined below), code, or functionality.

Axelera reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice.

Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

AXELERA products are sold subject to the Axelera standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of Axelera and the Customer ("Terms of Sale"). Axelera hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the Axelera product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

Axelera products are not designed, authorized, or warranted to be suitable for use in medical, military, aircraft, space, or life support equipment, nor in applications where failure or malfunction of the Axelera product can reasonably be expected to result in personal injury, death, or property or environmental damage. Axelera accepts no liability for inclusion and/or use of Axelera products in such equipment or applications and therefore such inclusion and/or use is at customer's own risk.

Axelera makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by Axelera. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product. Weaknesses in customer's product designs may affect the quality and reliability of the Axelera product and may result in additional or different conditions and/or requirements beyond those contained in this document. Axelera accepts no liability related to any default, damage, costs, or problem which may be based on or attributable to: (i) the use of the Axelera product in any manner that is contrary to this document or (ii) customer product designs.

No license, either expressed or implied, is granted under any Axelera patent right, copyright, or other Axelera intellectual property right under this document. Information published by Axelera regarding third-party products or services does not constitute a license from Axelera to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party, or a license from Axelera under the patents or other intellectual property rights of Axelera.

Reproduction of information in this document is permissible only if approved in advance by Axelera in writing, reproduced without alteration and in full compliance with all applicable export laws and regulations, and accompanied by all associated conditions, limitations, and notices.

THIS DOCUMENT AND ALL AXELERA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." AXELERA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE. TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT WILL AXELERA BE LIABLE FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, ARISING OUT OF ANY USE OF THIS DOCUMENT, EVEN IF Axelera HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Notwithstanding any damages that customer might incur for any reason whatsoever, Axelera's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms of Sale for the product.

Trademarks

The Axelera "AX" logo is a trademark of Axelera AI BV, registered in the Netherlands and other countries. "AXELERA" and "METIS" are registered as word marks across a number of countries/regions. Other company and product names may be trademarks of the respective companies with which they are associated.